



FAST 322



FAST 322 / FAST 322 YF

CHARACTERISTICS

	FAST 322	FAST 322 YF
	SCF322R	SCF322H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	●	●
HIGH PRECISION RECOVERY FUNCTION	●	●
AUTOMATIC OIL INJECTION with scale and refillable/hermetic bottles (OIL LOCK)	●	●
AUTOMATIC DYE INJECTION with scale and refillable/hermetic bottles (OIL LOCK) O-PK00096	●	●
HEATER BELT INCLUDED	●	●
USB PORT	●	●
INTERNAL DATA BASE including commercial and agricultural vehicles	●	●
INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (CFU-NITRO/CFU-NITRO.HD.XX)	✓	✓
STATUS INDICATORS	●	●
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	●	●
INTERNAL FLUSHING	●	●
A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING / ACC-EASYFLUSH PLUS)	✓	✓
PRESSURE AND TEMPERATURE TEST	●	●
CONFIGURABLE GAS TYPE from HF01234YF to --> R134a O-PK00097	●	●
BLUETOOTH CONNECTION APP OKSY [®] GEN+	●	●



● STANDARD SUPPLY ✓ OPTION

ACCESSORIES

	CODE	DESCRIPTION	FAST 322	FAST 322 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HF01234YF		✓
	O-PK00051 O-PK00051 OPZ	Printer kit	●	●
	GAS ID GAS ID OPZ	SAE J 2843 internal HF01234YF refrigerant identifier kit	✓	✓
	ACC-BLK-FAST300	Antidust Blanket	●	●

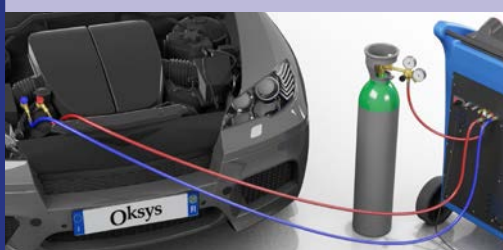


NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE CFU-NITRO

Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

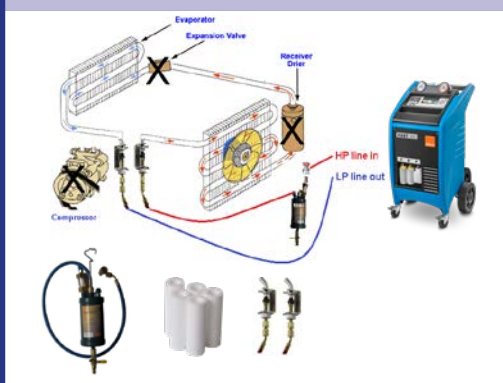
- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

FLUSHING

CODE ACC-FLUSHING
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

CODE ACC-EASYFLUSH PLUS

Visual Diagnostic Kit for A/C flushing

RANGE

R134a



R1234yf



MODEL

FAST 322

FAST 322 YF

TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	18 Kg	12 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	100 l/min	100 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	58x55x120 cm	58x55x120 cm
Weight	65/74 Kg	65/74 Kg
Packaging dimensions	63x63x123 cm	63x63x123 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	3m	3m
Blanket	YES	YES
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	Included	Included



Oksys

TOTAL DESIGN FOR
BEST PERFORMANCE